

PEXY Max Slide fittings




Applications:

Not demountable, PEXY Max is ideal for sanitary and heating installations.

Application	Operating temperature	System operating pressure
Drinking water	+5°C to +70°C	10 bar
Chilled water (up to 50% glycol)	Mini -10°C	10 bar
Heating water	Maxi +80°C	10 bar

Installation

- 1 Cut the pipe and slide the ring onto it.
- 2 Widen the pipe, using the correct tool.
- 3 Insert the fitting into the pipe.
- 4 Choose the appropriate jaws and slide the ring against the fitting.

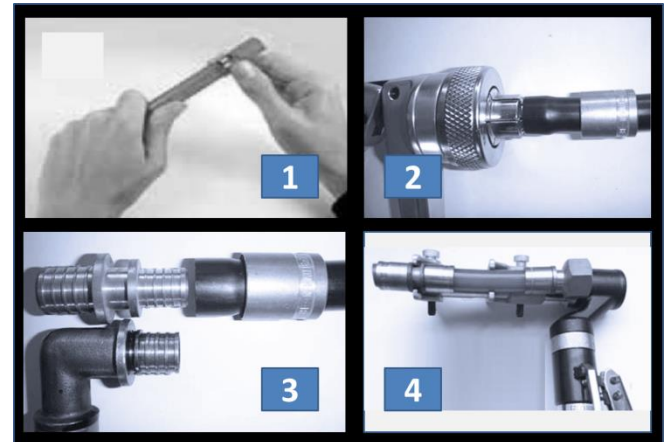

Description

Especially designed for application up to 10 bars nominal pressure, PEXY Max fittings to be used on PEX pipes goes from 16 up to 32 mm diameter.

Product features

- Slide fittings in brass from 16 to 32 mm.

Benefits

- PEXY Max fittings are easy and quick to install
- Not demountable, fit all applications.
- Reliable and safe.



PEXY fittings must only be installed with COMAP PEX pipes.

PEX pipes must follow the dimensions shown in the table below.

PEX max pipes				
External Ø (mm)	16	20	25	32
Thickness (mm)	2,2	2,8	3,5	4,4
Internal Ø (mm)	11,6	14,4	18	23,2

COMAP offers BetaPEX Max (1 layer pipe in PEX) and PentaPEX Max (5 layers pipe in PEX with EVOH barrier) specially dedicated for Pexy Max fittings (different colour pipes are available).

BetaPEX Max



PentaPEX Max



Warranty & Certifications

PEXY fittings are free from material or workmanship defects for a 10 years period as from the date of sale.

This warranty is subject to conditions. To have the details of our warranty conditions please ask your Comap representative.